




DSC ALL STAINLESS STEEL FLOAT & THERMOSTATIC STEAM TRAPS

No.F77 · F77F

MOP 20K x 280°C




- DSC F77 SERIES ARE COMPACT AND ALL SEALED STAINLESS STEEL FLOAT AND THERMOSTATIC STEAM TRAP.
- THE TRAPS ARE DESIGNED TO WORK WITH UNIVERSAL CONNECTOR WITH STRAINER OR WITHOUT STRAINER.
- AFTER SHUTING DOWN STEAM, IT IS VERY EASY TO REMOVE TRAP BY UNSCREWING TWO BOLTS.
- ALL STAINLESS MATERIAL PROVIDE STRONG BODY AND LIGHT WEIGT FOR INSTALLATION AND MAINTENANCE.
- IT IS SUGGESTED TO INSULATE IN EXTREME CONDITIONS.

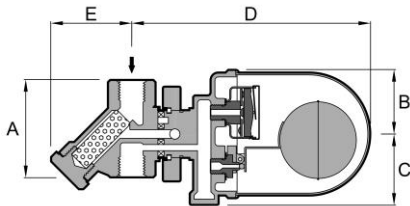

No.F77/C2 DIMENSIONS(MM). MOP(KG/CM²). WT(KG)

No.	CONN.SE*	A	B	C	D	E	MOP	WT.
F77/C2	15.20	72	48	52	178	60	20	1.6
F77/C2	25	76	48	52	178	60	20	1.6

*NPT. BSPT. SW AVAILBALE.

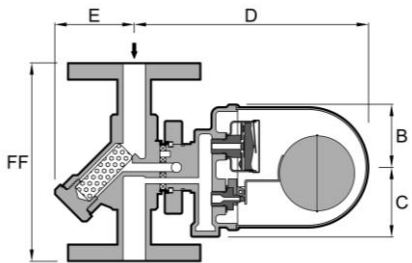

No.F77/C2F

No.	CONN.FE*	FF	B	C	D	E	MOP	WT.
F77/C2F	15.20	150	48	52	178	60	20	3
F77/C2F	25	160	48	52	178	60	20	3.2

*DIN FLANGE STANDARD. OTHER SPEC. CONSULT FACTORY.

F77 CONSTRUCTION OF MATERIALS

CAP & BODY	CF8 / S.S.304
SEAT & VALVE	CHROME STEEL HARDEND
MECHANISM	S.S.304
FLOAT	S.S.304
AIR VENT CAGE	S.S.304
STRAINER	S.S.304
GASKET	SPORAL WINDED GRAPHITE WITH S.S.304

C2 CONSTRUCTION OF MATERIALS

BODY	CF8
STRAINER	S.S.304
STRAINER GASKET	S.S.304 WITH GRAPHITE
STRAINER CAP	S.S.304
BOLT	ALLOY STEEL

CONDENSATE DISCHARGE CAPACITY IN KG/HR

