



SINCE 1975


DSC 11AV ALL STAINLESS STEEL FLOAT TYPE AIR VENT

No. 11AV

MOP 28K x 260°C



- DSC FLOAT TYPE AIR VENT INSTALL ON TOP OF PUMP, PIPE AND TANK TO ELIMINATE ACCUMULATED AIR.
- LIGHT AIR COMES TO AIR VENT LEAVE SEAT AND VALVE OPEN, AIR CAN BE CONTINUOUSLY VENTED TILL WATER MOVES IN. FLOAT MOVES UP AND GUIDES LEVER TO CLOSE SEAT, VALVE
- ONCE AIR VENT CLOSED, THERE ARE SOME AIR EXIST BETWEEN FLOAT AND SEAT, VALVE TO PREVENT WATER FLOW OUT.
- ALL SEALED STAINLESS STEEL BODY IS BENEFIT OF HIGH STRENGTH AND CORROSION RESISTANCE.
- FRICTIONLESS MECHANISM DELIVERS LONG SERVICE YEARS.
- INLET WITH INTEGRAL STRAINER FOR BETTER PROTECTION.
- LIGHT IN WEIGHT.

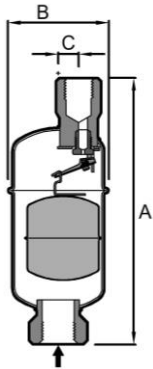

No. 11AV DIMENSIONS (MM). MOP(KG/CM²). WT(KG)

No.	CONN.SE*	OUTLET	A	B	C	MOP	WT
11AV	15.20.25	15	186	70	14	28	0.7

*NPT. PT. SW. AVAILABLE.

CONSTRUCTION OF MATERIALS

BODY	S.S.304
	S.S.316
SEAT & VALVE	HARDEND CHROME STEEL
MECHANISM	S.S.304
FLOAT	S.S.304
CONNECTOR	S.S.304
STRAINER	S.S.304

DISCHARGE CAPACITY Nm³/min

ORIFICE	2.5mm	1.9mm
	1K	0.07
3K	0.15	0.10
5K	0.22	0.14
10K	0.41	0.27
17K	0.66	0.43
28K		0.67