




# DSC CAST STEEL THERMODYNAMIC STEAM TRAPS

No.D60 · D60F

MOP 46K x 425°C




- DSC D60 THERMODYNAMIC STEAM TRAPS WITH INSULATION CAP TO PROTECT STEAM CONSUMPTION DURING COLD AND RAINY CONDITIONS.
- DISC AND SEAT ARE LAPPED TO MEET LIGHT BAND FLATNESS · SEAT AND DISC CAN BE TIGHTLY SEALED DURING OPERATION.
- THIS MODEL CAN BE USED FOR SUPER HEAT STEAM SERVICE.
- SCREWED OR FLANGE CONNECTIONS AVAILABLE.
- INTERNAL PARTS CAN BE REPLACED.



**No. D60** DIMENSIONS(MM). MOP(KG/CM<sup>2</sup>). WT(KG)

No.	CONN.SE*	A	B	C	MOP	WT.
D60	15.20	80	52	58	46	1
	25	90	55	65	46	1.3

\*NPT. PT. SW AVAILABLE.

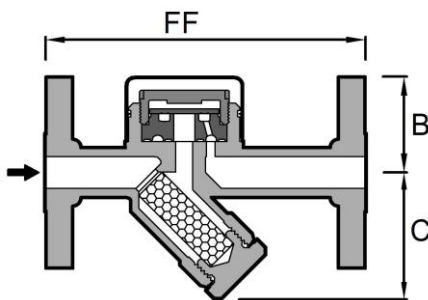

**No. D60F**

No.	CONN.FE*	FF	B	C	MOP	WT.
D60F	15.20	150	52	58	46	5
	25	160	55	65	46	6

\*DIN FLANGE STANDARD. OTHER SPEC. CONSULT FACTORY.

## CONSTRUCTION OF MATERIALS

BODY	CAST STEEL
INSULATION CAP	S.S.304
DISC CAP	S.S.420 HARDEND
DISC	S.S.420 HARDEND
DISC SEAT	S.S.420 HARDEND
DISC GASKET	COMPRESSED NON-ASBESTOS
STRAINER	S.S.304
STRAINER CAP	CARBON STEEL
STRAINER GASKET	S.S.304

## CONDENSATE DISCHARGE CAPACITY IN KG/HR

