



SINCE 1975

DSC VB-1 ALL STAINLESS VACUUM BREAKER

No.VB-1

MOP 10K x 200°C




THE DSC VB-1 VACUUM BREAKER IS THE POSITIVE MEANS OF PREVENTING DAMAGE TO TANKS, COOKERS, COILS, FIN TUBING AND ALL APPLICATIONS WHERE TEMPERATURE DROPS IN STEAM AND HOT WATER CONTAINERS, PIPES, ETC, CREATE VACUUM.

TO RELIEVE VACUUM FORMED BY THROTTLING CONTROL VALVE IN STEAM MAINS, COILS, UNIT HEATERS, FIN TUBING, ETC AND AVOID POSSIBILITY

OF WATER HAMMER. TO RELIEVE VACUUM FORMED IN JACKET KETTLES WHEN STEAM IS SHUT OFF AND THIS PREVENT COLLAPSE OF JACKET. ANY STEAM OR WATER SYSTEM WHERE VACUUM MUST BE REDUCED OR ELIMINATED BY QUICK POSITIVE ACTION.

OPENS AT APPROXIMATELY 2-1/2" H.G.

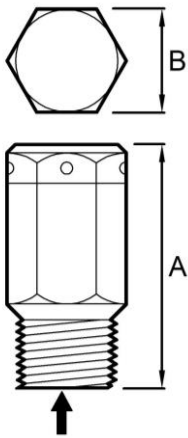

No.VB-1 DIMENSION(MM). MOP(KG/CM²) . WT(KG)

No.	CONN	A	B	MOP	WT.
VB-1	15	62	25.4	10	0.3

CONSTRUCTION OF MATERIALS

PARTS	MATERIAL
BODY & CAP	S.S. 304
SPRING	S.S. 304
SPRING BRACKET	S.S. 304
BALL	S.S. 440
SEAL O RING	NEOPRENE