




DSC ALL STAINLESS STEEL BIMETALLIC STEAM TRAPS

No. SB73、SB73F

MOP 32K x 320°C




- DSC SB73 BIMETALLIC STEAM TRAP WITH STAINLESS STEEL BODY FOR OPERATING PRESSURE UP TO 32KG/CM²x 320°C.
- EXCELLENT CORROSION RESISTANCE.
- EXCELLENT RESISTANCE TO HYDRAULIC SHOCKS.
- DO NOT VENT AIR AND CO₂ AT STEAM TEMPERATURE.
- GOOD OPERATION AGAINST BACK PRESSURE.
- GOOD RESISTANCE TO DAMAGE FROM FREEZING
- DELAYED RESPONSIVENESS TO SLUGS OF CONDENSATE.
- SMALL COMPARATIVE PHYSICAL SIZE.



No.SB73 DIMENSIONS(MM). MOP(KG/CM²) . WT(KG)

No.	CONN.SE*	A	B	C	MOP	WT.
SB73	15.20	85	73	24	32	0.9

* NPT. BSPT. SW AVAILABLE.

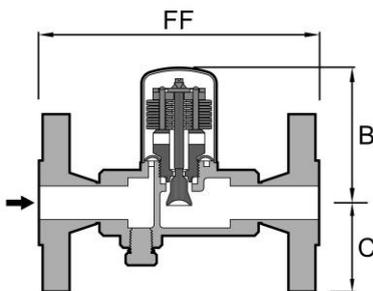

No.SB73F

No.	CONN.FE*	FF	B	C	MOP	WT.
SB73F	15.20	150	73	53	32	3.2

* DIN FLANGE STANDARD. OTHER SPEC. CONSULT FACTORY.

CONSTRUCTION OF MATERIALS

BODY	S.S.304
BIMETLLIC ELEMENT	S.S.304
VALVE	S.S.420 HARDEND
SEAT	S.S.420 HARDEND
STRAINER	S.S.304

CONDENSATE DISCHARGE CAPACITY IN KG/HR

