




DSC STAINLESS STEEL FLOAT & THERMOSTATIC STEAM TRAPS

No.F71 · F71F

MOP 20K x 280°C




- DSC F71 SEALED STAINLESS STEEL F&T STEAM TRAP IS NOTED FOR COMPACT AND LIGHT WEIGHT WITH SUPERIOR EFFECIENCE OF ENERGY CONSERVATION.
- HORIZONTAL INLET AND OUTLET DIRECTION FROM EITHER SIDE CAN BE ORDERED STRAINER IS FITTED IN INLET CHANNEL SCREWED AND FLANGED CONNECTIONS CAN BE MADE TO SPECIFICATIONS AS DEMANDED.
- INTEGRAL STRAINER IS INSTALLED.

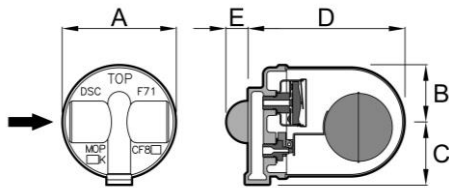

No. F71 DIMENSIONS(MM). MOP(KG/CM²). WT(KG)

No.	CONN.SE*	A	B	C	D	E	MOP	WT.
F71	15.20	83	48	52	132	18	20	1.2

*NPT. BSPT. SW AVAILABLE.

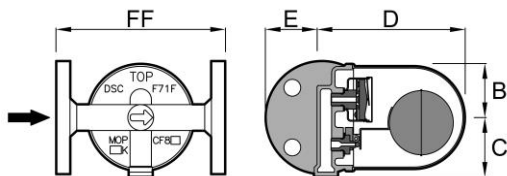

No.F71F


No.	CONN.FE*	FF	B	C	D	E	MOP	WT.
F71F	15.20	150	50	52	124	53	20	2.5
F71F	25	160	50	52	124	53	20	2.5

*DIN FLANGE STANDARD. OTHER SPEC. CONSULT FACTORY.

CONSTRUCTION OF MATERIALS

CAP & BODY	S.S.304
SEAT & VALVE	CHROME STEEL HARDEND
MECHANISM	S.S.304
FLOAT	S.S.304
AIR VENT CAGE	S.S.304
DIFFUSER	S.S.304
STRAINER	S.S.304
BOLTS & NUTS	S.S.304

CONDENSATE DISCHARGE CAPACITY IN KG/HR.

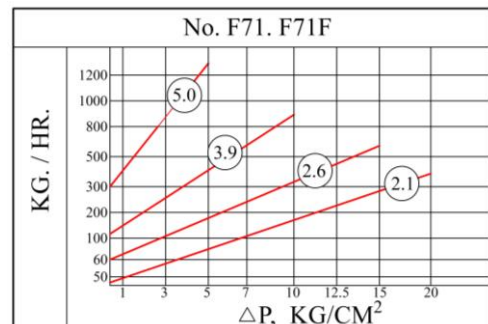

F71 STEAM TRAP FLOW DIRECTION OPTION

